



SUNSYNK-W5.3



DATASHEET


www.sunsynk.com
sales@sunsynk.com
customerservices@sunsynk.com

Model		SUNSYNK-W5.3
Main Parameter		
Battery Chemistry		LiFePO ₄
Capacity (Ah)		104
Scalability		Max.32 pcs in parallel (170kWh)
Nominal Voltage (V)		51.2
Operating Voltage (V)		43.2~57.6
Energy (kWh)		5.32
Usable Energy (kWh) ¹		4.79
Charge/Discharge Current (A)	Recommend ²	50
	Max. ²	100
	Peak (2mins,25°C)	150
Other Parameter		
Recommend Depth of Discharge		90%
Dimension (W x H x Dmm)		440 x 620 x 135 (doesn't include circuit breaker, terminals and hanging board)
Weight (kg)		46
Master LED Indicator		5 LED (SOC 20%~100%)
		2 LED (working, protecting)
IP Rating of Enclosure		IP65
Working Temperature		Charge: -10°C ~ +55°C Discharge: -20°C ~ +55°C
Storage Temperature		0°C ~ +35°C
Humidity		5% ~ 95%
Altitude		≤2000m
Cycle Life		≥6000 (25±2°C,90%DOD,0.5C/1C,70%EOL)
Installation		Wall-Mounted (supports 19-inch standard cabinet)
Communication Port		CAN2.0, RS485
Life Cycle Power During Warranty Period ³		16MWh@70%EOL
Certification		IEC62619, CE, UK, CEC, UN38.3

¹ DC Usable Energy, test conditions: 90% DOD, 0.5C charge & discharge at 25° C. System usable energy may vary due to system configuration parameters.

² The current is affected by temperature and SOC.

³ The warranty is due whichever reached first of warranty period or energy throughout.

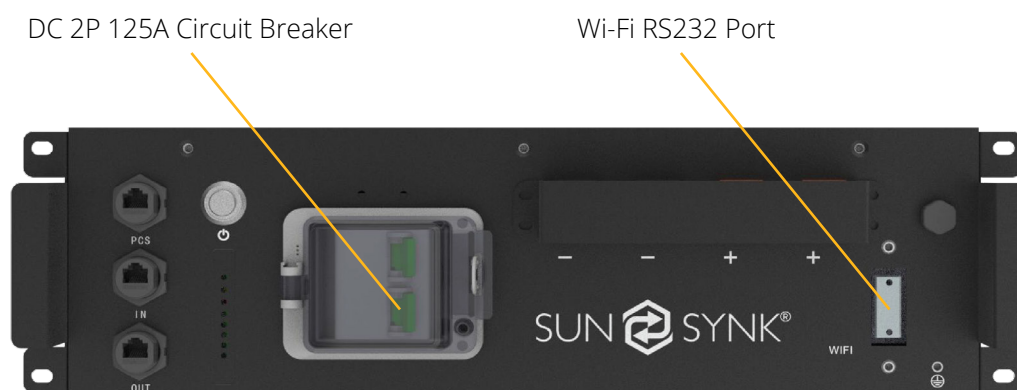



CONTACT US

Call us: +44 151 832 4300 **Email us:** sales@sunsynk.com

HK Address: Room 702-704, 7/F Texwood Plaza, 6 How Ming Street, Kwun Tong, Kowloon, Hong Kong.

UK Address: Sunsynk UK Ltd, 17 Turnstone Business Park, Mulberry Avenue, Widnes, Cheshire, WA8 0WN.

SA Address: Globaltech Sunsynk South Africa (Pty) Ltd, Unit 2 Highview Boulevard, Ferndale 2194.

NL Address: Sunsynk NL BV, Henri Wijnmalenweg 8, 5657 EP Eindhoven, Netherlands.

GlobalTech Ltd

ena
energy networks
association



SGS

UK
CA CE

Powered by
SUN SYNK